

NuDET NaI

Sodium Iodide Scintillation Detectors and Probes



NuDET NaI series offers a variety of NaI(Tl) scintillation detectors with standard shapes and dimensions. The integrally-mounted scintillation assemblies are hermetically sealed units containing NaI(Tl) crystal, optically coupled to a photomultiplier tube (PMT). The assemblies are designed for crystals up to 3 inches diameter. The NaI probes are characterized by their high efficiency and consistent energy resolution.

Benefits

- In-house production ensures consistent quality and high performance
- Advanced encapsulating techniques and photomultiplier selection lead to improved energy resolution and the long-term-stability of the probes
- Integrally-mounted scintillation assemblies offer many advantages, such as permanent light-sealing, thus protecting the photomultiplier against light and physical damage

Key figures

< 7 %

Energy resolution for 2" x 2" detector at 662 keV

< 7.5 %


Energy resolution for 3" x 3" detector at 662 keV

Product description

NaI(Tl) detectors are available in three basic configurations:

- SBG NaI(Tl) scintillation probes,
- SBW well-type NaI(Tl) scintillation probes,
- SNG NaI(Tl) scintillation probes with integrated voltage divider.

A complete SBG detector includes a PMT (standard 14-pin plug). Model SNG comes with an integrated voltage divider and connector or cable interface.

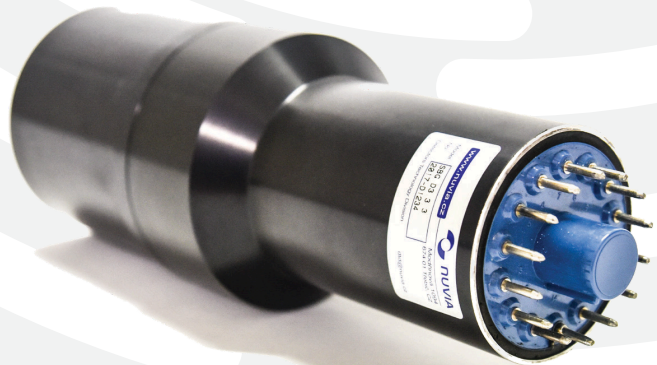

Product application

- Gamma ray spectroscopy
- Radioisotope assay
- Thyroid uptake measurement
- Health physics
- Radiation detection





Product specifications

- Thin aluminium radiation entrance window
- Mechanic adjustments (special flanges, mounting fixtures or other adjustments and modifications)
- Voltage divider is not integrated, is possible to add as option
- Choice of connectors or cable interface
- In the offer there are also encapsulated crystals without PMT

Standard (SBG)/Well Type (SBW) 2" x 2" and 3" x 3" Probes	SBG.D2.2.2	SBG.D3.3.3
Detector	Integrally-mounted scintillation assembly with NaI(Tl) scintillation detector	Integrally-mounted scintillation assembly with NaI(Tl) scintillation detector
Crystal size	2" x 2"	3" x 3"
Resolution	<7 % at 662 keV	<7.5 % at 662 keV
Interface/socket	PMT pins (standard 14-pin plug)	PMT pins (standard 14-pin plug)

Dimensions (mm)

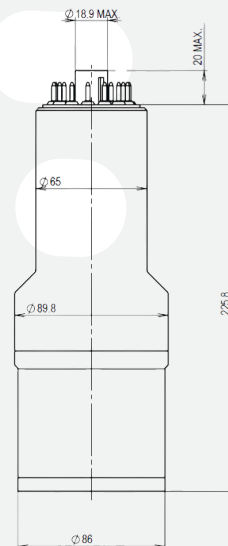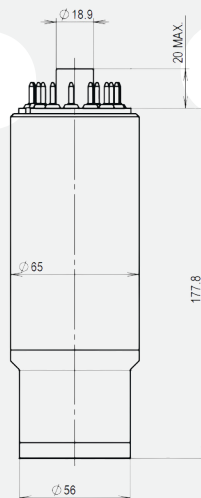

NaI(Tl) Properties

Density	Max. emission	Decay constant	Refractive index	Conversion efficiency	Hygroscopic
3.67 g/cm ³	415 nm	0.23 μs	1.85	100	yes